


- Sandwich plate design for use in vertical stacking assemblies
- With integrated logic valve
- Pressure difference adjustable from 5 - 40 bar
- Installation dimensions to ISO 4401 CETOP-RP 121H, ISO 4401:1994 and DIN 24 340-A6

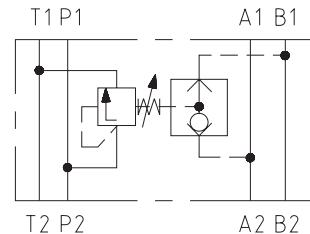

Functional Description


The valves TV2-043/M and TV2-063/M are designed as a sandwich plate of size 04 and 06. They consists of a body, a logic valve and a pressure compensator with control spool.

The ports A and B are always connected through the logic valve seat with the spring side of spool. The higher pressure pushes the ball onto the seat that is affected by lower pressure. This always causes the channel with the higher pressure to be connected with the control spool spring room.

The required pressure difference between port P and the spring room is adjusted. When the pressure difference

between P and the spring room exceeds the value set, the control spool shifts, causing the part of pressure fluid to pass from P to T until the desired pressure difference has been restored.

Usually, this pressure compensator is used in connection with a proportional directional valve. In this case, each value of the control signal a particular constant flow rate can be assigned, this being independent of load.

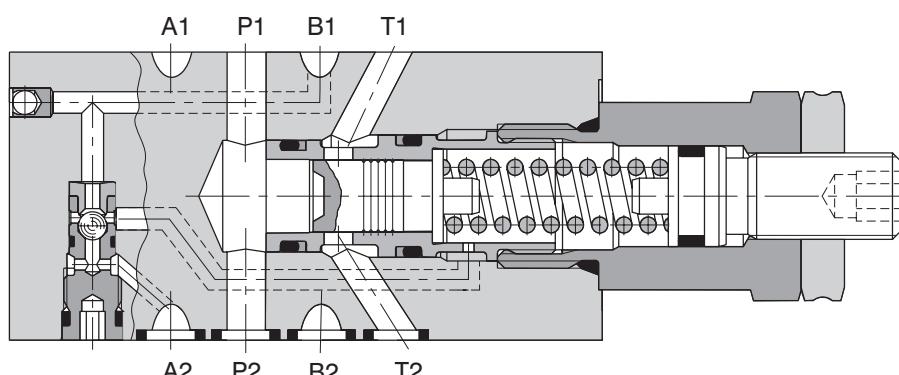

Ordering Code

TV2 - **3/M**

Pressure Compensator

without designation

Seals

NBR

FPM (Viton)

Nominal size

size 04

04

size 06

06

**A
B
C**

Model

in channel A

in channel B

in channels A and B

3 way Pressure Compensator


Sandwich plate design

Technical Data


Nominal size	mm	04	06		
Maximum flow	L/min	20	40		
Max. operating pressure	bar	320			
Pressure drop on valve Δp	bar	5 - 40			
Hydraulic fluid	Hydraulic oils of power classes (HL, HLP) to DIN 51524				
Maximum degree of fluid contamination	Class 21/18/15 to ISO 4406 (1999)				
Weight (Model A,B,C)	kg	0.6	1.00		
Mounting position	optional				

Functional Symbols


Model A

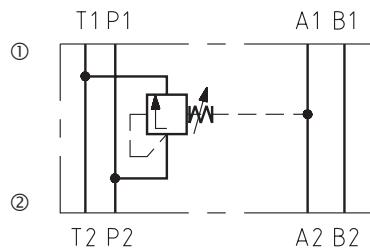

Model B

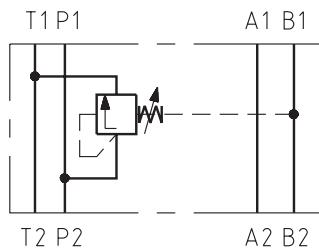


Model C

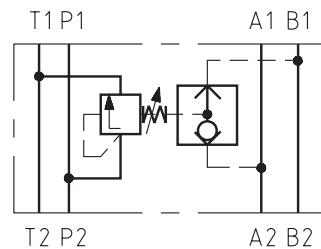

① valve side

② plate side

Typical Applications

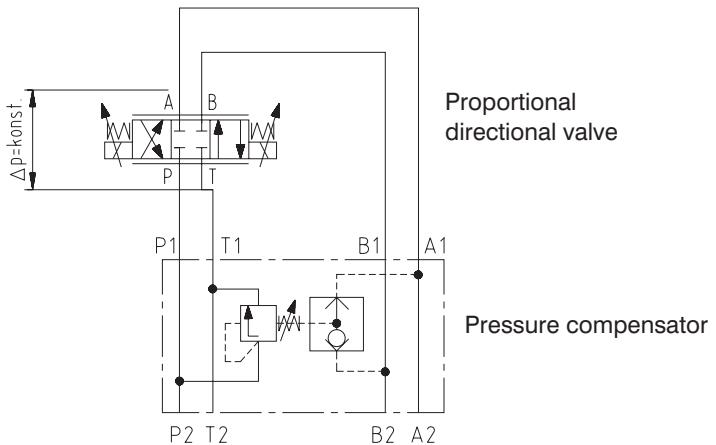


Characteristics


Measured at $v = 32\text{mm}^2/\text{s}$

The characteristic of the pressure compensator corresponds with the flow rate of a PRM2-043Z11/12 and PRM2-063Z11/30 proportional directional valve. By increasing the flow resistance due to a flow rate increase, also the outside pressure difference has to be increased, in order to ensure the correct control function.

Tv2-043/M

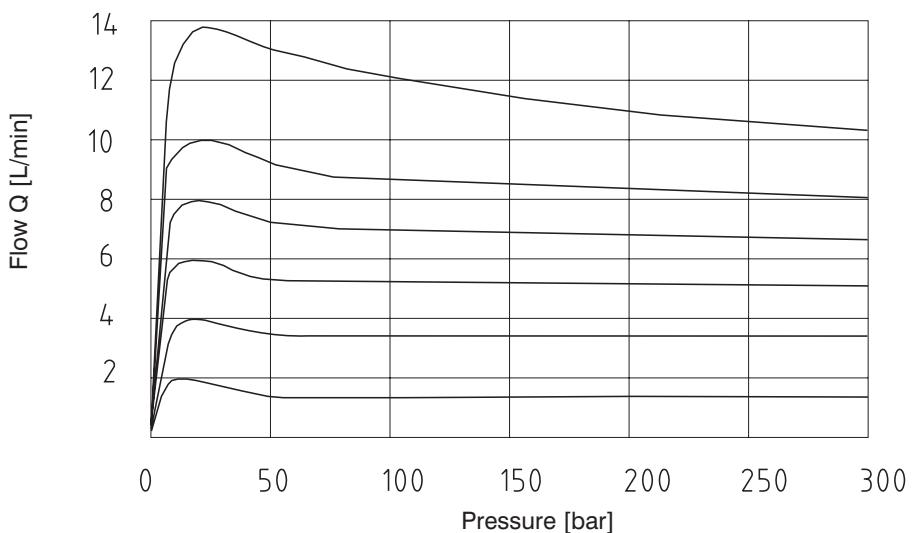

TV2-063/M

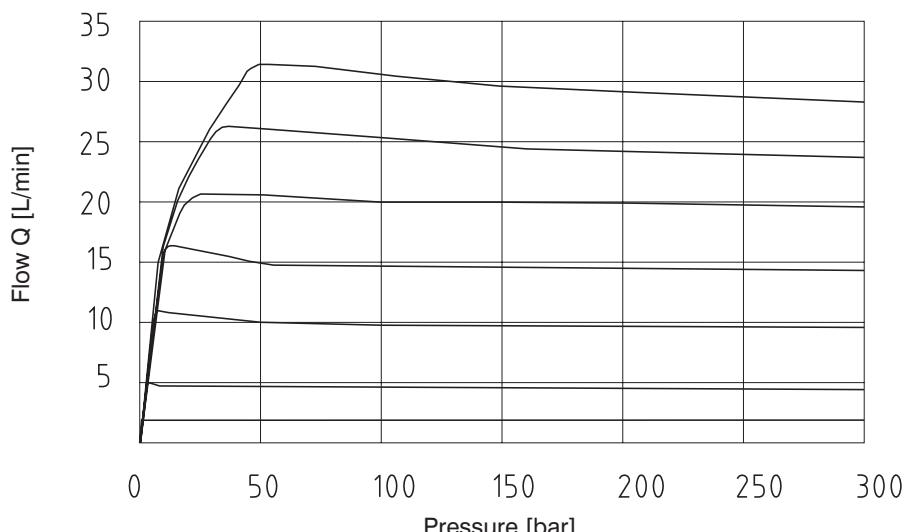


Valve Dimensions


Dimensions in millimetres

TV2-043/M

- 1 Name plate
- 2 Square ring 7.65 x 1.68 (4 pcs.)
- 3 4 mounting holes

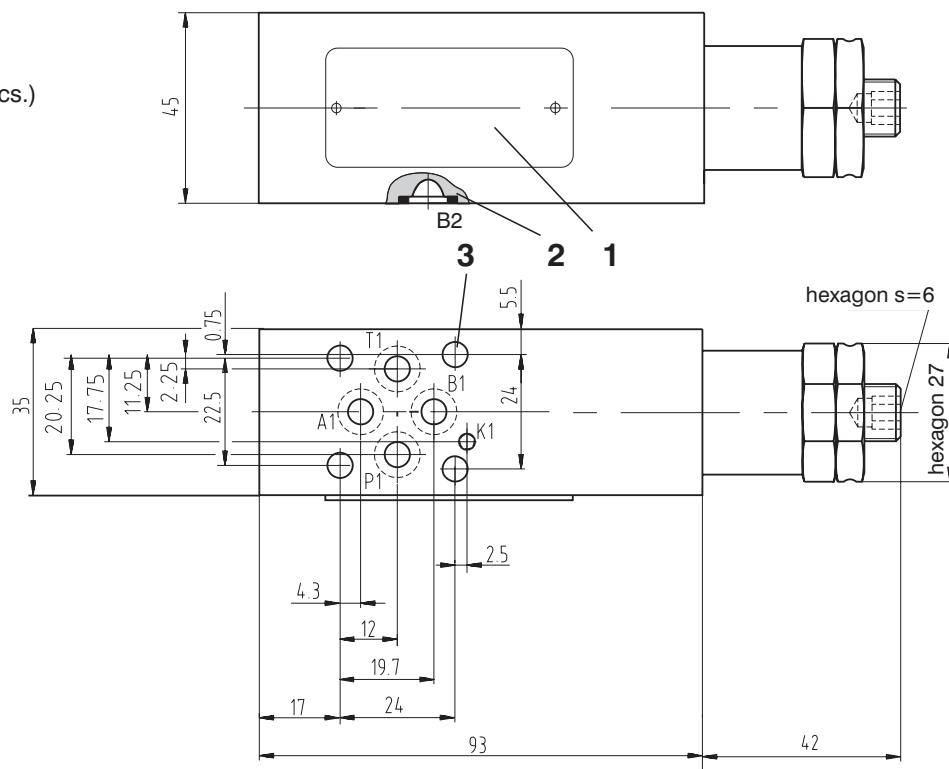**TV2-063/M**

- 1 Name plate
- 2 Square ring 9.25 x 1.68 (4 pcs.)
- 3 4 mounting holes

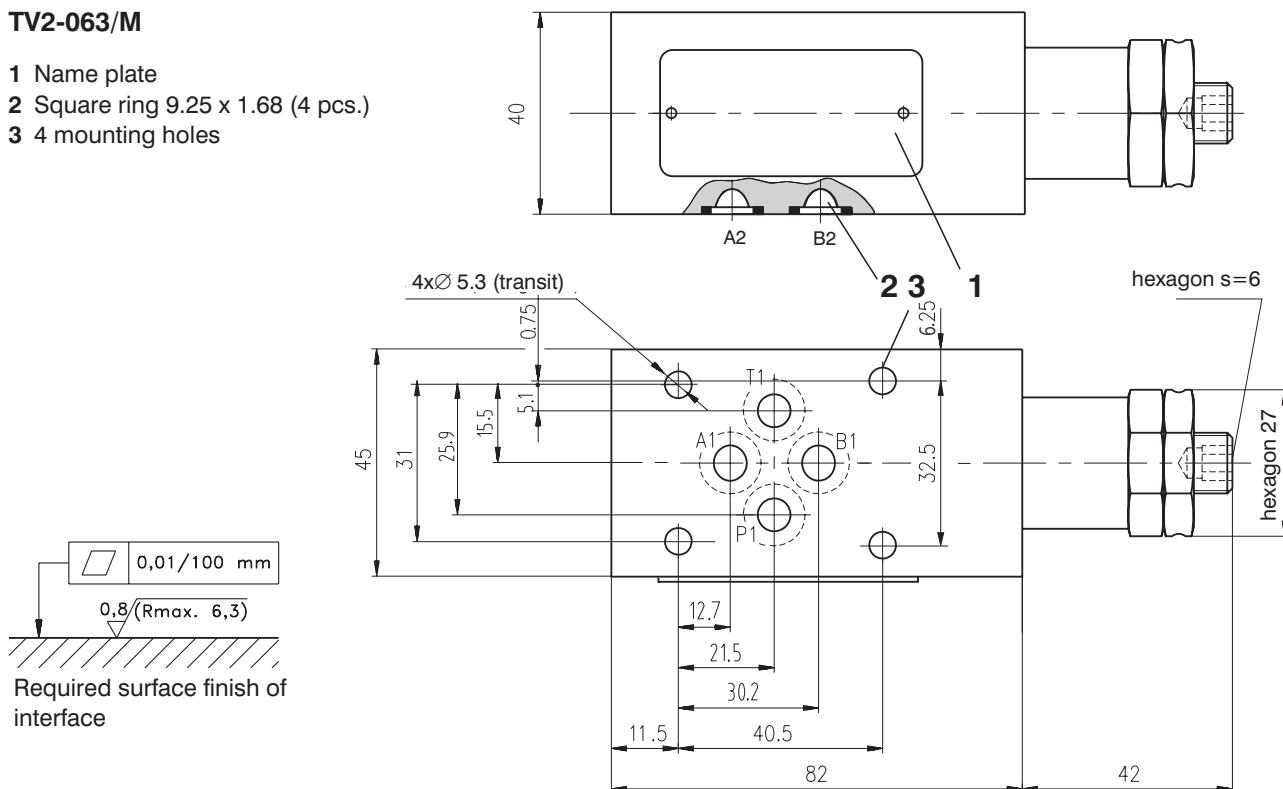**Caution!**

- The packing foil is recyclable. The protective plate can be returned to manufacturer.
- The technical information regarding the product presented in this catalogue is for descriptive purposes only. It should not be construed in any case as a guaranteed representation of the product properties in the sense of the law.

ARGO-HYTOS s.r.o. CZ - 543 15 Vrchlabí
 Tel.: +420-499-403111, Fax: +420-499-403421
 E-mail: sales.cz@argo-hytos.com
 www.argo-hytos.com