

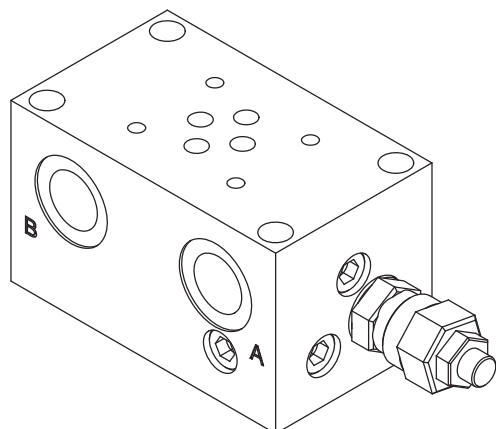


BASE SINGOLA CETOP 3 CON UTILIZZI A-B LAT. P-T POST. 1/2" BSP
SUB-PLATE CETOP 3 WITH A-B PORTS ON SIDE P-T BACK 1/2" BSP




Schema idraulico
Hydraulic diagram

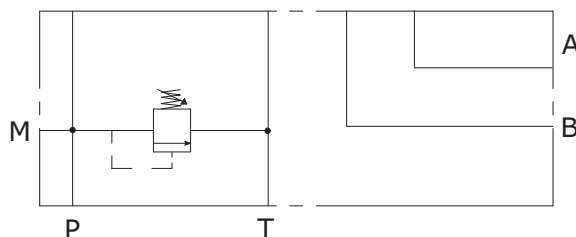

TIPI DI REGOLAZIONE
REGULATION TYPE

	H	VITE CON CHIAVE ESAGONALE (standard) HEXAGONAL HEAD SCREW
	K	POMOLO KNOB
	C	FISSA CON CAPPuccio COVER CAP
	I	INVOLABILE NON ADJUSTABLE

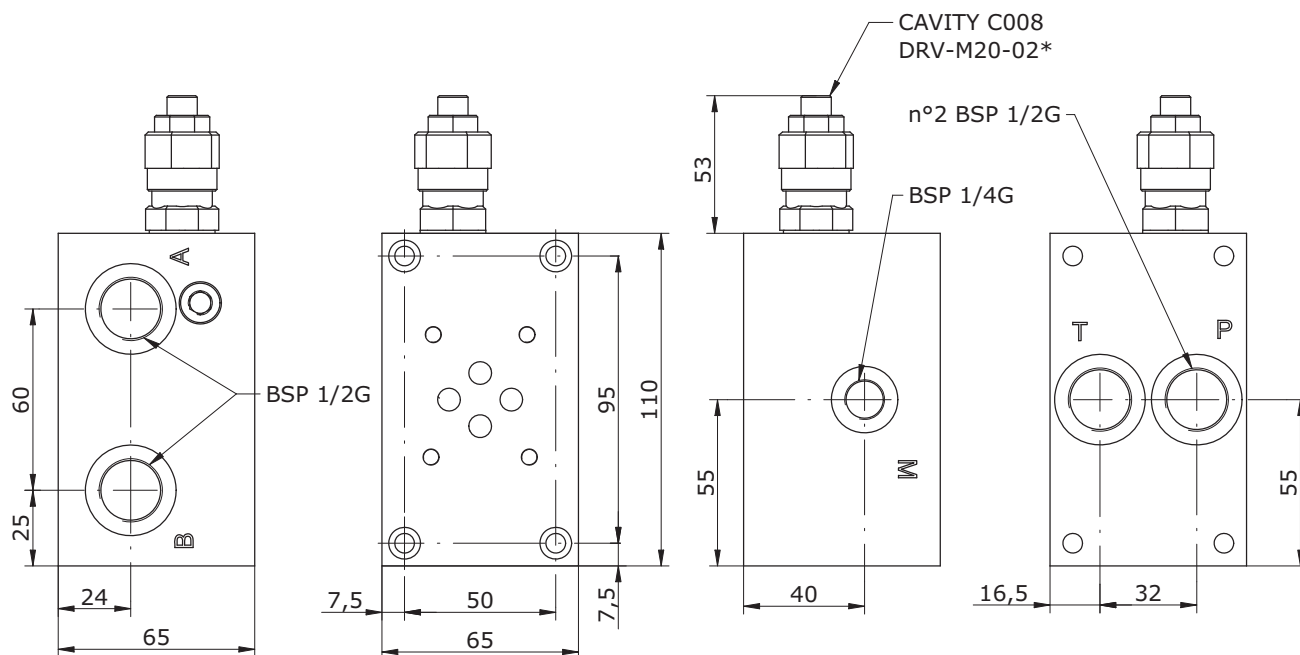

E_06 - 10 - 12 - - - -

S = STEEL
A = ALUMINUM

0 = WITHOUT RELIEF VALVE
1 = WITH RELIEF VALVE
2 = RELIEF VALVE READY

OMIT
H = HEXAGONAL HEAD SCREW
K = KNOB
C = COVER CAP
I = NOT ADJUSTABLE

0 = WITHOUT R.V.
1 = 5-50 BAR
2 = 20-110 BAR
3 = 50-220 BAR
4 = 100-350 BAR
5 = 100-420 BAR