



BASE SINGOLA CETOP 3 CON UTILIZZI A-B-P-T LAT. P-T POST. 3/8" BSP
SUB-PLATE CETOP 3 WITH A-B-P-T PORTS ON SIDE P-T BACK 3/8" BSP


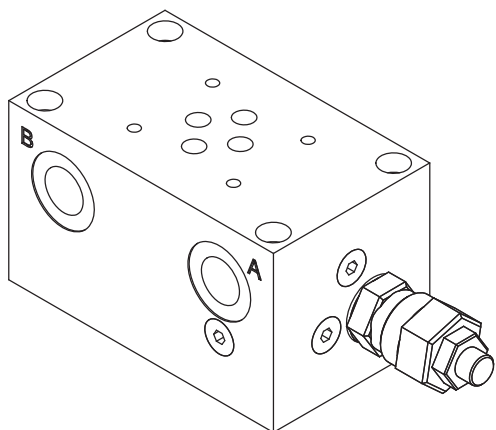


Schema idraulico
Hydraulic diagram

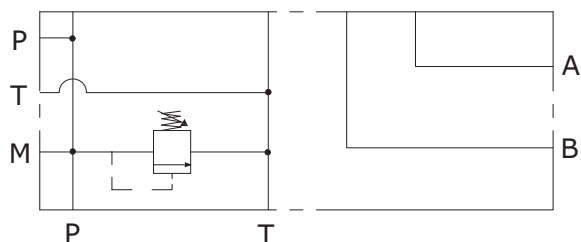

TIPI DI REGOLAZIONE
REGULATION TYPE

	H	VITE CON CHIAVE ESAGONALE (standard) HEXAGONAL HEAD SCREW
	K	POMOLO KNOB
	C	FISSA CON CAPPUCCIO COVER CAP
	I	INVOLABILE NON ADJUSTABLE

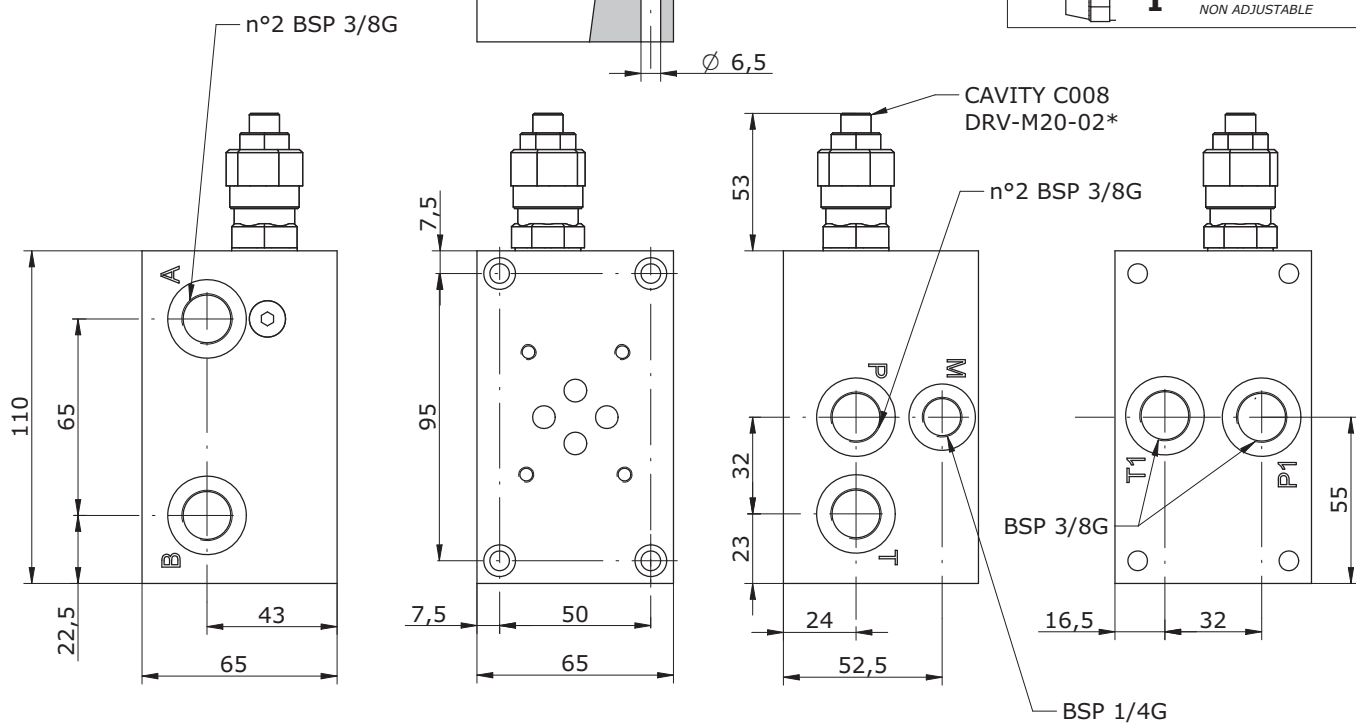

E_ 06 - 10 - 38 - - - -

S = STEEL
A = ALUMINUM

0 = WITHOUT RELIEF VALVE
1 = WITH RELIEF VALVE
2 = RELIEF VALVE READY

0 = WITHOUT RELIEF VALVE
H = HEXAGONAL HEAD SCREW
K = KNOB
C = COVER CAP
I = NOT ADJUSTABLE

0 = WITHOUT R.V.
1 = 5-50 BAR
2 = 20-110 BAR
3 = 50-220 BAR
4 = 100-350 BAR
5 = 100-420 BAR

*see *CARTDRIGE VALVES* catalog