
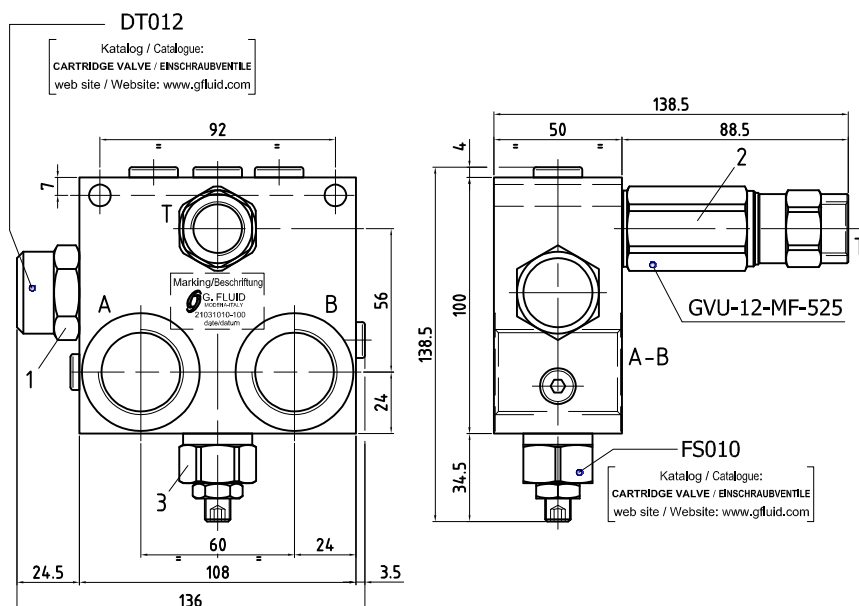


TECHNICAL DATA TECHNISCHE ANGABEN

Max operating pressure Maximaler Betriebsdruck	35 MPa 5076 psi
Max flow Volumenstrom	100 l/min 26.4 gpm
Temperature range Betriebstemperatur	-20°/80°C
Filtration Filtergrad	40μ
Weigth Gewicht	4.2 kg
Material Material	Zincoated Steel Verzinkter Stahl

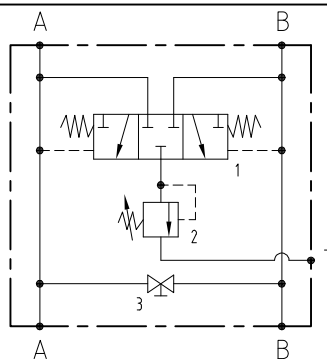

ORDERING INSTRUCTIONS - BESTELLANLEITUNG


21031010 1 0

	Port size/Gewinde A, B T		Adjustment range Regelbereich	standard setting Standardkalibrierung
4	G 3/4"	G 1/2"	0.5-2.5 MPa	1.2 MPa
5	G 1"			

GVS-HTP-F02


TECHNICAL DATA TECHNISCHE ANGABEN

Max operating pressure Maximaler Betriebsdruck	35 MPa 5076 psi
Max flow Volumenstrom	100 l/min 26.4 gpm
Temperature range Betriebstemperatur	-20°/80°C
Filtration Filtergrad	40μ
Weigth Gewicht	4.0 kg
Material Material	Zincoated Steel Verzinkter Stahl

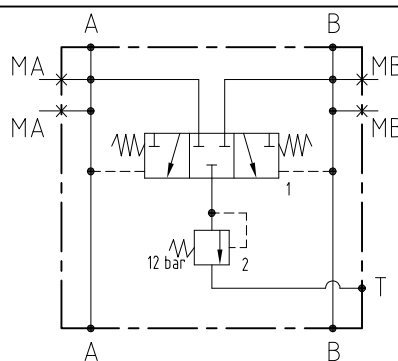

PORT SIZE GEWINDE

MA, MB, MA, MB	G 1/4"

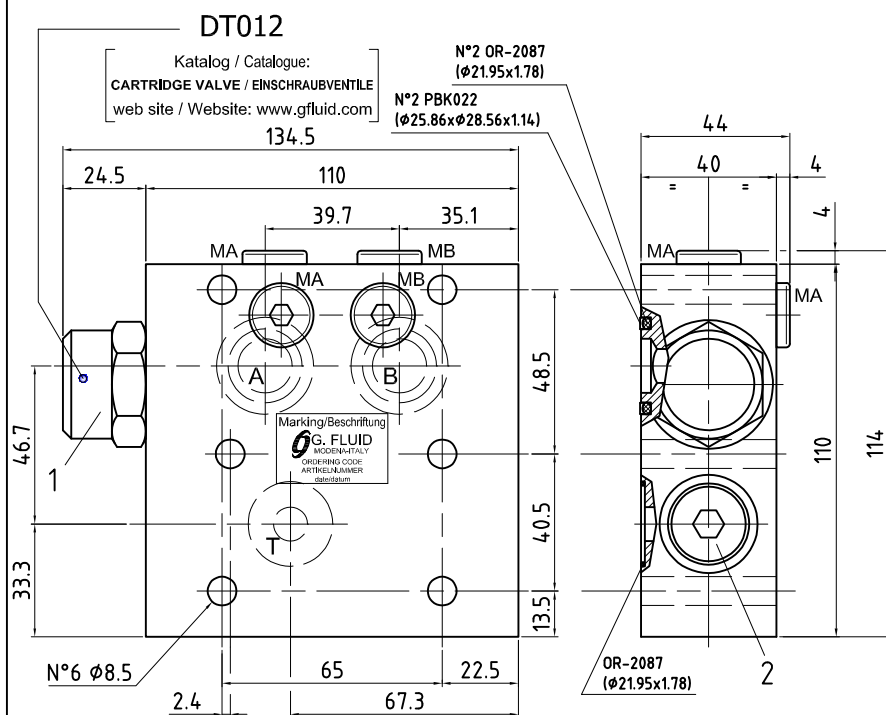

ORDERING CODE - ARTIKELNUMMER

2103102001 0

