
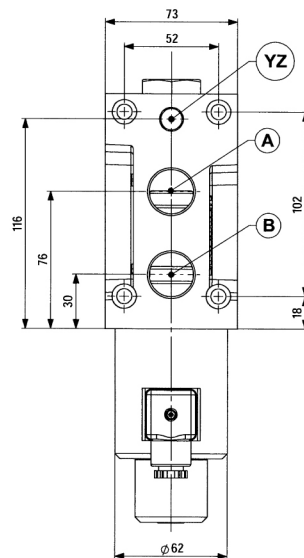
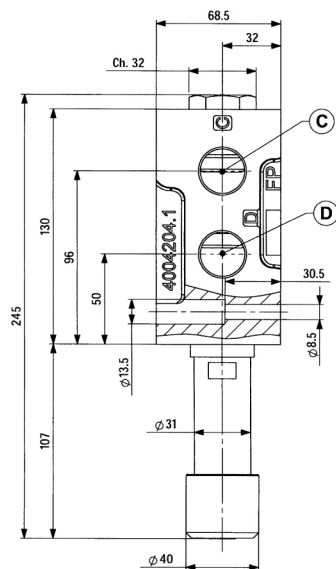


Product	M	YZ
KV 6/2 10 1/2 YZ LL	G1/2	G1/4
KV-6/2-10- 3/4-YZ-LL	G3/4	G1/4



Electrical		
Supply voltage	V	12 DC, 24 DC
Power	W	36
Ambient temperature	°C	to +50
Coil temperature	°C	to +180
Duty cycle	continuous	

Technical Data

		Hydraulic
Size		10
Flow rate	l/min	120
Operating pressure	bar	350
Pressure (port YZ)	bar	max. 210
Oil temperature range	°C	-20 to +70
Viscosity range	mm ² /s	15 to 380
Filtration	NAS 1638	8