
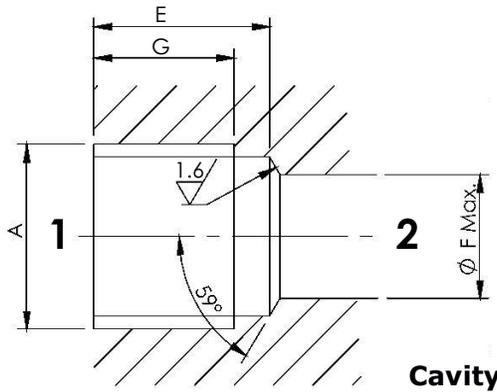
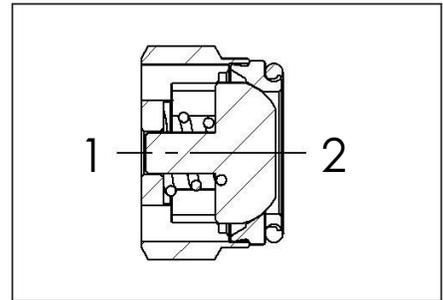
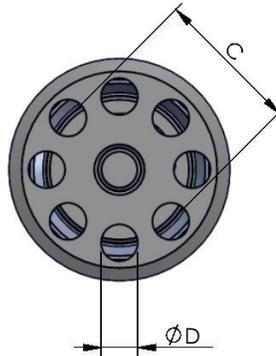
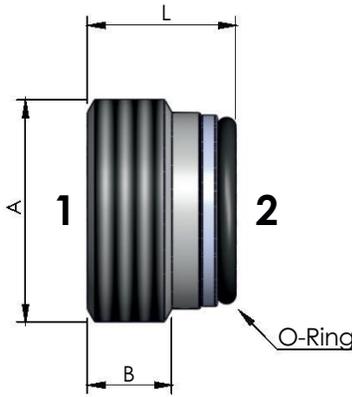


### Check valves, insert poppet type


Rev.03 - 02.2015

**Specification:**

Fluid viscosity:		10-550mm <sup>2</sup> /s
Filtration:		ISO code 16/13
Fluid temperature:		-20°C +80°C
Ambient temperature:		-20°C +50°C

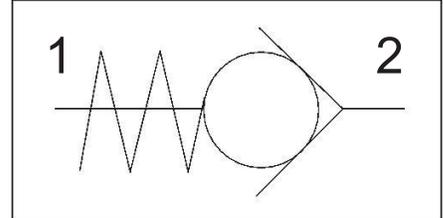

Cavity

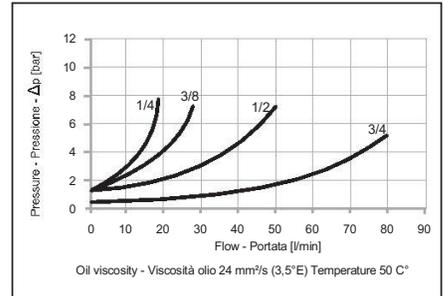

### Ordering code example

**13-C-00-C01-6-0-\*\*-\*-0**

Code	Thread A1-A2
02	1/4" BSPP
03	3/8" BSPP
04	1/2" BSPP
05	3/4" BSPP



Options:

Tool

Code	A	B	C	D Ø	E	F Ø	G	L	O-Ring	Tool Code	Max Flow (l/min)	Weight (kg)	Max.Press. (bar)	Cracking Pressure (bar)
13-C-00-C01-6-0-02-0	1/4" BSPP	5	8	Ø 2,2	24	Ø 7	22	10	1,78 x 7,65	50.13.00.A0.3.1.02.0	20	0,006	500	0,5
13-C-00-C01-6-0-03-0	3/8" BSPP	7	10,8	Ø 3	29	Ø 9	27	12	1,78 x 10,82	50.13.00.A0.3.1.03.0	35	0,012	500	0,5
13-C-00-C01-6-0-04-0	1/2" BSPP	8	13,8	Ø 3,5	32	Ø 12	29	14	1,78 x 14	50.13.00.A0.3.1.04.0	60	0,022	350	0,5
13-C-00-C01-6-0-05-0	3/4" BSPP	9,5	18	Ø 4,5	37	Ø 16	33	17	1,78 x 18,77	50.13.00.A0.3.1.05.0	80	0,046	350	0,5